

IC-R3DYN Dynamic Control Guard Rail

H:1000 mm



Impact Control

✉ sales@imp-control.com 🌐 imp-control.com

IC-R3DYN Dynamic Control Guard Rail

H:1000 mm

The Dynamic Impact Control R3 Guard Rail delivers modular, high-performance protection for industrial environments - combining controlled energy absorption, flexible configuration, and clear separation between people, equipment, and traffic zones.

MODULAR CONFIGURATION

The Dynamic Control R3 Guard Rail delivers modular protection, allowing flexible configurations including straight runs, L- and U-shaped layouts, and full perimeter protection around columns and equipment - available in multiple height options to suit varying protection requirements.

DUAL PROFILE OPTIONS

Available in two profile sizes - 80×40×2.9 mm and 80×80×2.9 mm - the system adapts to different protection demands, from standard applications to higher-impact environments.

EASY MAINTENANCE, MINIMAL DOWNTIME

Modular components enable fast replacement of individual rails or posts in case of damage - ensuring quick recovery and uninterrupted operations.

ALL-ENVIRONMENT DURABILITY

Electro-galvanized steel with high-performance powder coating (RAL 1018), providing long-term resistance to corrosion, UV exposure, chemicals, and demanding industrial conditions - with minimal maintenance.

CLEAR VISUAL & PHYSICAL GUIDANCE

Provides both a visible and physical boundary, helping to organize traffic flow, improve driver awareness, and reduce the risk of unintended contact in active environments.

R3 FLOOR-LEVEL PROTECTION

R3 Protection extends coverage to floor level — protecting against low-impact collisions where it matters most.



Impact Control

IC-R3DYN Product Specification and Use – H:1000 mm

 MATERIAL PROPERTIES

MATERIAL:	AISI 1020
YIELD STRENGTH:	3.51571e+08 N/m^2
TENSILE STRENGTH:	4.20507e+08 N/m^2

 VOLUMETRIC PROPERTIES referring to Bollards only

MASS:	17.5 kg
-------	---------

 COLOR & COATING

 BOLLARD RAL1018. Electro-Galvanized + powder coating. According to ISO9001:2015, certified by SGS.	 BASE RAL9005. Electro-Galvanized + powder coating. According to ISO9001:2015, certified by SGS.	 RAIL Grey. Hot dip galvanized steel. Heavy duty structural finish.
--	---	--

 DIMENSIONS

Height (H):	1000 mm	Guard Rail (Standard):	80×40×2.9 mm
Bollard Profile:	80×80×5 mm	Guard Rail (HD):	80×80×2.9 mm
Base:	195×195×72 mm		

 IMPACT RATING referring to Bollards only

1,850J

 TEMPERATURE RATING & INSTALLATION





TEMPERATURE RATING -40 to +65° C	INSTALLATIONS On top of solid concrete surfaces only	ELASTOMER MATERIAL NR (Natural Rubber) SVR 3L
-------------------------------------	---	---

 **Anchor screws:** 14×135 mm concrete screws



IC-R3DYN Product Specification and Use – H:1000 mm

 PRODUCT SPECIFICATIONS

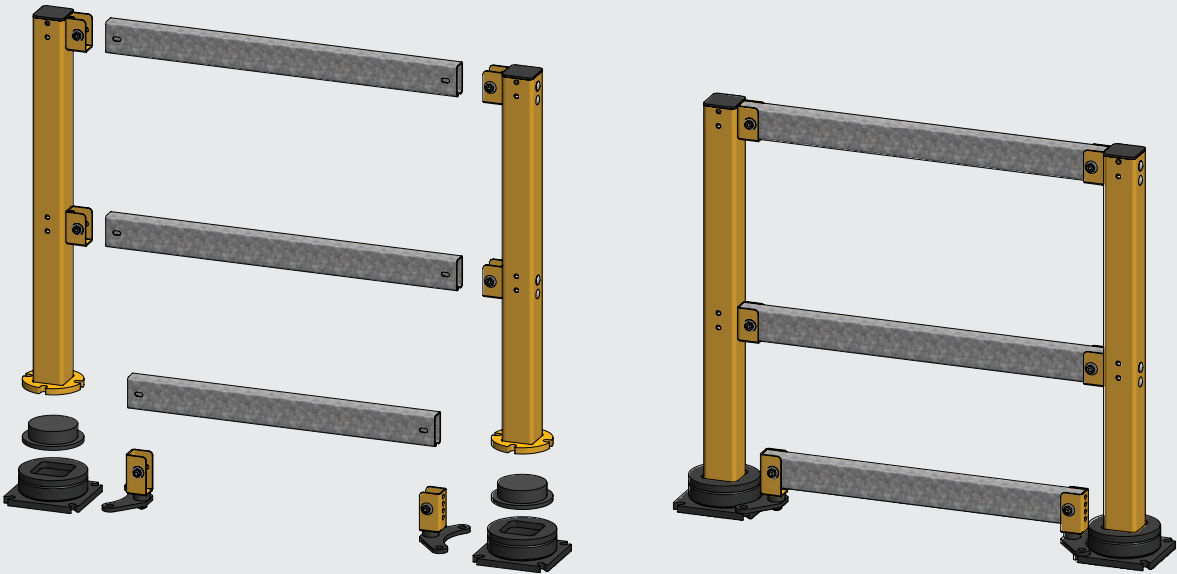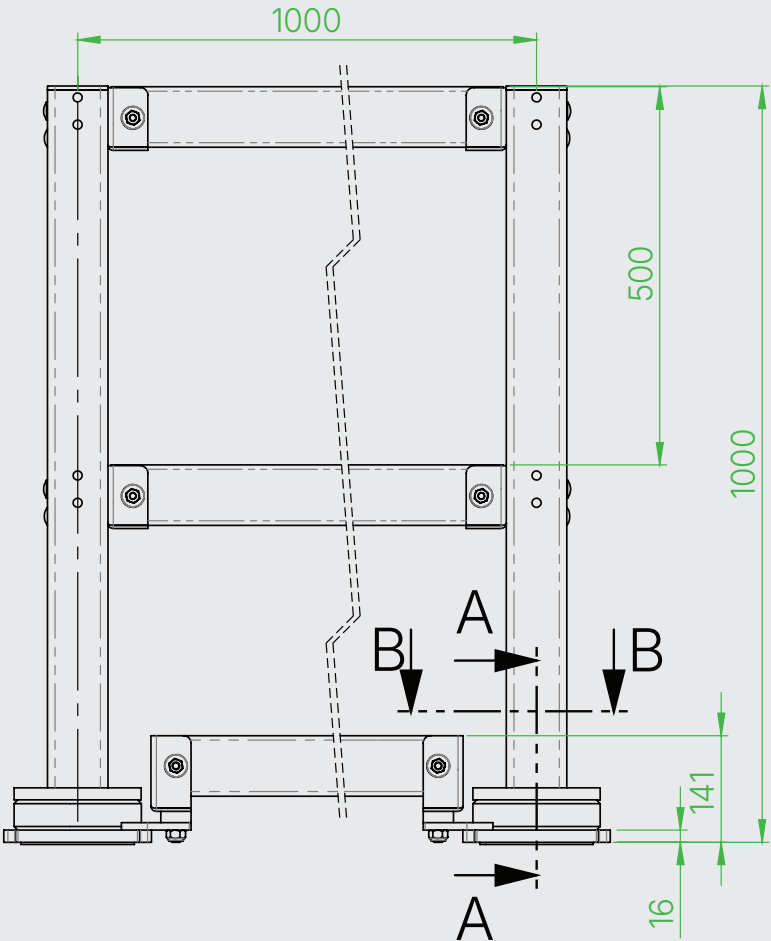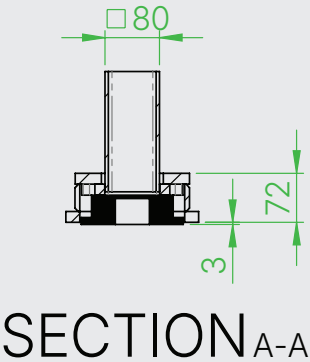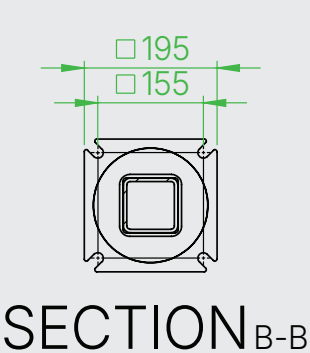

Impact Control

IMPACT TEST RESULTS

