

IC-500209 Impact Bollard

H:760 mm



Impact Control

✉ sales@imp-control.com 🌐 imp-control.com

IC-500209 Impact Bollard

H:760 mm

Impact Control delivers smart protection solutions designed to reduce impact risks - keeping people, equipment, and operations safe in dynamic industrial environments.

TARGETED ASSET PROTECTION

Provides focused protection at critical points - safeguarding machines, loading doors, and equipment from vehicle contact without interrupting workflow.

CONFIGURED FOR REAL OPERATIONS

Available in multiple height configurations to match varying equipment types, traffic conditions, and protection needs.



ALL-ENVIRONMENT DURABILITY

Electro-galvanized steel with high-performance powder coating (RAL 1018), providing long-term resistance to corrosion, UV exposure, chemicals, and demanding industrial conditions - with minimal maintenance.

APPLICATION-DRIVEN SOLUTION

Best suited for environments where rigid, point-specific protection is required - without the need for energy absorption systems.

Impact Control

IC-500209 Product Specification and Use – H:760 mm



MATERIAL PROPERTIES

MATERIAL:	AISI 1020
YIELD STRENGTH:	3.51571e+08 N/m^2
TENSILE STRENGTH:	4.20507e+08 N/m^2



VOLUMETRIC PROPERTIES referring to Bollards only

MASS:	14 kg
-------	-------



COLOR & COATING



BOLLARD

RAL1018. Electro-Galvanized + powder coating. According to ISO9001:2015, certified by SGS.



BASE

Silver (Electro-Galvanized)



DIMENSIONS

Height (H):	760 mm
Bollard Profile:	80×80×5 mm



TEMPERATURE RATING & INSTALLATION

TEMPERATURE RATING
-40 to +65° C

INSTALLATIONS
On top of solid concrete surfaces only

! Anchor screws: 12×70 mm concrete screws

Impact Control





sales@imp-control.com



imp-control.com

IC-500209 Product Specification and Use – H:760 mm

PRODUCT SPECIFICATIONS

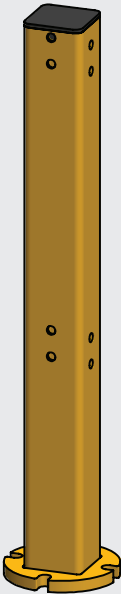

SECTION_{B-B}

